


ENGEL CONVEYING SYSTEM Förderband: GFB60 – STS

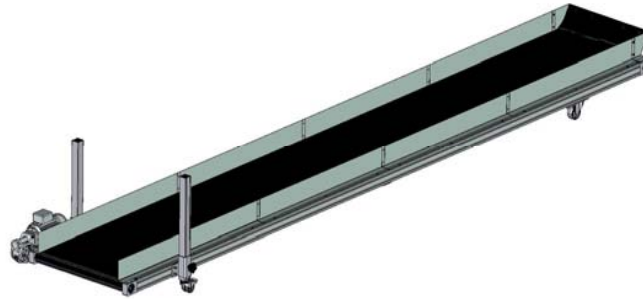

Anmerkung: Bestellangaben siehe Bestellformular


Standardausführung:

- Förderband für Engel – Maschinen
- Bandkörper aus Aluminiumprofilsystem
- Untergestell aus Stahlprofilen
- Lenkrolle mit Bremse und Bockrolle für leichterenTransport
- Motor 0,12 kW – 6m/min
- Motoranlage auf Profil, Klemmkasten unten
- PVC–Gurt: Schwarz, 80°C
- Führungsbleche Niro H=100 mm
- 6m – Kabel mit Stecker
- Verstellbar ± 5°
- Max. Fördergewicht: 30 Kg
- Max. Teilgewicht: 0,1 Kg
- Motorschutzschalter

Note: For order specification see order form

Standard type:

- Conveyor for Engel machines
- Main frame out of aluminium extrusions
- Base frame in solid steel design
- Guide with brake and control roller for easy transport
- Engine 0,12 kW – 6m/min
- Motor at the profile, Terminal box underneath
- PVC band: Schwarz, 80°C
- Deflector stainless steel H=100 mm
- 6m cabel with connector
- Setting ± 5°
- Max. conveying load 30 Kg
- Max. part weight: 0,1 Kg
- Circuit - breaker

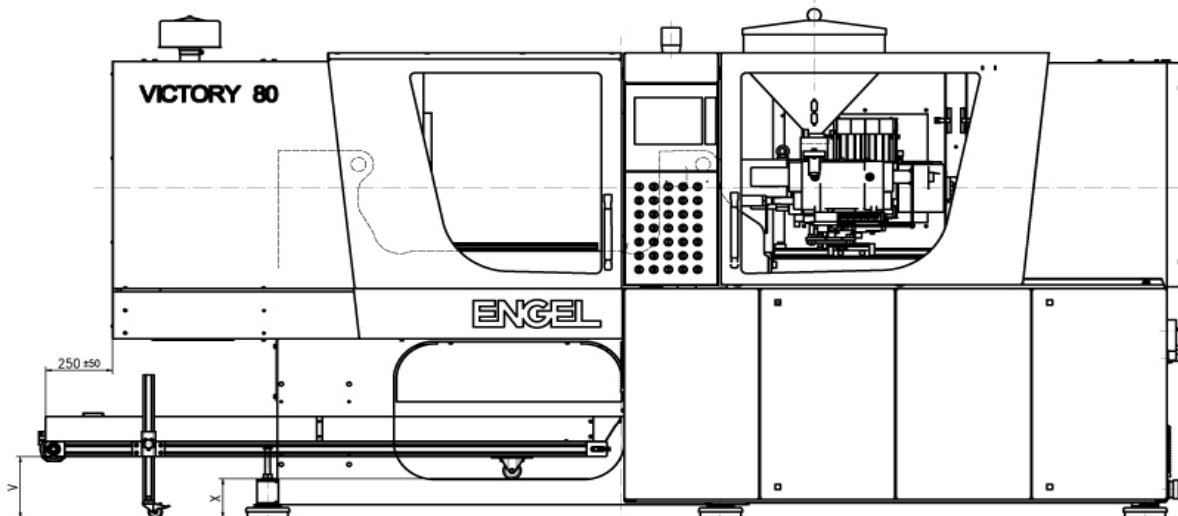

GFB60-STS						
MASCHINE	BK	NB	GB	L	V	X
VC */28, 40, 50	370	250	300	1700	220	129-142
VC */60, 70, 80	420	300	350	2000	250	157-172
VC */90, 110, 120	470	350	400	2400	250	154-169
VC */130, 150	520	400	450	2800	250	159-174
VC */180, 200, 220	570	450	500	3300	290	196-211
VC */260, 300	670	550	600	3800	320	229-244
VC */350, 400	670	550	600	4100	330	240-257
EM */55	520	400	450	2000	250	159-174
EM */100	570	450	500	2500	250	159-174
EM */150, 180	670	550	600	2900	250	159-174
EM */100T	470	350	400	2500	250	157-172
EM */180T	570	450	500	2900	260	163-187
EM */180T WP	570	450	500	3100	260	163-187
EM */225T	670	550	600	3400	250	159-174
EM */280T	670	550	600	3500	260	163-187
EM */280T WP	670	550	600	3500	260	163-187
EM */380T	670	550	600	4200	260	163-187
EM */500T	670	550	600	4800	250	160-184
E-MAX */50	470	350	400	1800	250	154-169
E-MAX */100	470	350	400	2100	250	157-172
E-MAX */180	570	450	500	3000	250	157-172
SPEED 180	570	450	500	2900	260	165-184
SPEED 180 WP	570	450	500	3100	260	168-192
SPEED 280	670	550	600	3500	260	163-187
SPEED 280 WP	670	550	600	3500	260	163-187
SPEED 380	670	550	600	4100	260	163-187
SPEED 500	670	550	600	4800	250	160-184
ELAST */90, 110, 120 VC	520	400	450	2400	250	154-169
ELAST */130, 150 VC	620	500	550	2800	250	159-174
ELAST */180, 200, 220 VC	670	550	600	3300	290	199-214
ELAST */260, 300 VC	670	550	600	3800	320	229-244

!* SONDER UNTERGESTELL

